

इन्दिरा गांधी राष्ट्रीय मानव संग्रहालय,  
पोस्ट बैग नं. 2 शामला हिल्स,  
भोपाल-462013

क्र. : -F.20-01/2023 माडलिंग  
दिनांक :- 23/01/2025

दूरभाष- 266067

सेवा में,  
मेसर्स,

विषय:- संग्रहालय परिसर में म्यूजियम शॉप के पीछे मूर्तियों को रखने का पेडेसटल बनाने हेतु निविदा।

महोदय,


1. पिछले पृष्ठ पर जिस कार्य का उल्लेख किया गया है उस कार्य को इस संग्रहालय द्वारा कराये जाने का प्रस्ताव है। यदि आप इस कार्य को कर सकने की स्थिति में हो तो आपसे अनुरोध है कि आप इस कार्य के लिये अपनी दरें बन्द लिफाफे में भेजें।
2. इस कार्य की दरें सील बंद लिफाफे में जमा करने की अंतिम तिथि 29/01/2025 है। निर्धारित तारीख के पश्चात प्राप्त दरों को मंजूर नहीं किया जायेगा।
3. कार्य की बनावट, उनकी कोटि आदि के पूरे ब्यौरे का उल्लेख इन दरों में होना चाहिये।
4. प्रति यूनिट दर उद्धृत की जाये और जहां निवल उत्पाद, बिक्री कर या अन्य अधिभार आदि अतिरिक्त लिया गया हो उसका भी उल्लेख विषेष रूप से इन दरों में किया जाये। सामग्री संग्रहालय परिसर के स्टोर तक रखने का मालभाड़ा दुलाई चढ़ाई एवं उतरने का खर्च दरों में शामिल होगा जिसका कोई अतिरिक्त राशी देय नहीं होगी।
5. निदेशक, राष्ट्रीय मानव संग्रहालय को यह अधिकार है कि वे बिना कोई कारण बतलाये दरें नामंजूर कर सकते हैं और निम्नतम से दरें स्वीकृत कर सकते हैं।
6. इसमें उल्लेखित मात्रा उपयुक्त है आर्डर देते समय वास्तविक आवश्यकताओं के अनुसार इनकी मात्रा घटाई/वढ़ाई जा सकती है।
7. दरें मुहरबंद लिफाफे में निम्न हस्ताक्षरी के नाम से प्रेषित की जाये कार्यालय संदर्भ संख्या F.20-01/2023 माडलिंग तारीख 23/01/2025 को दर देय है, तथा "संग्रहालय परिसर में म्यूजियम शॉप के पीछे मूर्तियों को रखने का पेडेसटल बनाने हेतु निविदा" का उल्लेख दर से संबंधित लिफाफे के ऊपर आवश्यक रूप में अंकित किया जाना चाहिये।

भवदीय  
सूर्य कुमार पांडे  
(डॉ. एस.के. पाण्डेय)  
कार्यालय प्रमुख

निम्नलिखित कार्य सम्पन्न किये जाने हैं

Item no	Particulars	Unit	Qty	Rate	Amount
1	Earth work in surface excavation not exceeding 30 cm in depth but exceeding 1.5 m in width as well as 10 sqm on plan including getting out and disposal of excavated earth upto 50 m and lift upto 1.5 m, as directed by Engineer-in-Charge:				
	All kinds of soil	Sqm	48		
2	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level :				
	1:3:6 (1 Cement : 3 coarse sand (zone-III) derived from natural sources : 6 graded stone aggregate 20 mm nominal size derived from natural sources)	Cum	5		
3	1:2:4 (1 Cement : 2 coarse sand (zone-III) derived from natural sources : 4 graded stone aggregate 40 mm nominal size derived from natural sources)	Cum	3		
4	Brick work with non modular fly ash bricks conforming to IS:12894, class designation 10 average compressive strength in super structure above plinth level up to floor V level in : Cement mortar 1:6 (1 cement : 6 Coarse sand)	Cum	10.76		
	Kota stone slab flooring over 20 mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab, including rubbing and polishing complete with base of cement mortar 1 : 4 (1 cement : 4 coarse sand): 25 mm thick KOTA STONE	Sqm	17.65		
5	15 mm cement plaster on rough side of single or half brick wall of mix: 1:6 (1 cement: 6 coarse sand)	Sqm	5		

6	Finishing walls with Acrylic Smooth exterior paint of required shade : New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including priming coat of exterior primer applied @ 0.90 litre/10 sqm)	sqm	5		
		Total			
		Add G.S.T			
		Grand total cost in Rs			

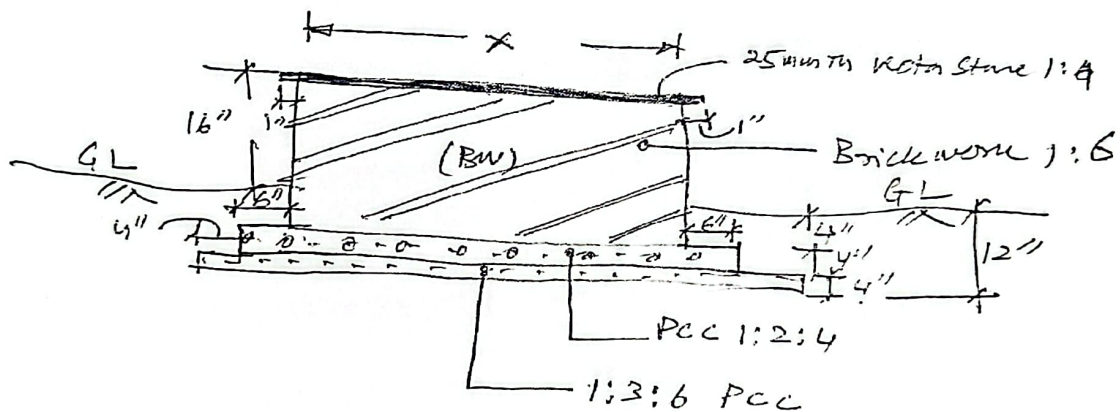

Typ. section of Pedestal

**Terms & Condition: -**

1. The work shall be executed as per CPWD specification 2023 (Volume I&II) with upto date correction slips.
2. The rates shall include all leads, lifts and transportation charges of materials. The contractor shall be responsible to pay all the taxes as required and nothing shall be reimbursed by the department.
3. During execution of work, the required co-ordination is necessary with the departmental Security Staff for the safety of the Sangrahalaya.
4. Nothing shall be paid as extra, except the quoted rates given and approved by the competent authority for the different agreement items.
5. Quantities shown in BOQ may increase or decrease. The payment will be made after actual measurement of work and satisfactory complete of work.

6. In case of any dispute, the decision of the Director, IGRMS, Bhopal shall be final and binding on the agency.
7. Time allowed for completion of work is 30 days from date of issue of work order
8. The working space and electrical connection & water supply will be provided free of cost in IGRMS campus for facilitating early completion of works.

बैंक खाता क्रमांक एवं आयकर नम्बर (पैन) का घोषणा पत्र :

बैंक खाता नम्बर :		
आयकर नम्बर (चाछ):		
बैंक का नाम:		
बैंक का आई.एफ.एस कोड:		

ठेकेदार/सप्लायर के हस्ताक्षर

